

11-6625-2643-24P

TM 11-6625-2643-24P

TECHNICAL MANUAL

**ORGANIZATIONAL, DIRECT SUPPORT AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST
FOR
TEST SET, AUDIO TS-3171A/U
(NSN 6625-00-918-5721)**

NEWARK PUBLIC LIBRARY

FEB 14 1986

U. S. GOVT. PUBS.
DEPOSITORY 326

HEADQUARTERS, DEPARTMENT OF THE ARMY

18 NOVEMBER 1985

D 101.11:

TECHNICAL MANUAL

No. 11-6625-2643-24P

TM 11-6625-2643-24P

HEADQUARTERS

DEPARTMENT OF THE ARMY

WASHINGTON, DC, 18 November 1985

**ORGANIZATIONAL, DIRECT SUPPORT AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST**

FOR

**TEST SET, AUDIO TS-3171A/U
(NSN 6625-00-918-5721)**

Current as of 26 June 1985

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-ME-MP, Fort Monmouth, New Jersey 07703-5007.

In either case, a reply will be furnished direct to you.

Table of Contents

		Page	Ilus Figure
SECTION	I. Introduction	1	
	II. Repair Parts List	1-1	
GROUP	00 Test Set, Audio TS-3171A/U	1-1	1
	01 Front Panel	2-1	2
	02 Circuit Card Assembly A2	3-1	3
	03 Circuit Card Assembly A1	4-1	4
	04 Case Assembly	5-1	5
SECTION	III. Special Tools List (Not applicable)		
	IV. National Stock Number and Part Number Index	1-1	



SECTION I INTRODUCTION

1. Scope

This manual lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE); and other special support equipment required for performance of organizational, direct support, and general support maintenance of the TS-3171A/U. It authorizes the requisitioning, issue, and disposition of spares, repair parts and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numeric sequence, with the parts in each group listed in ascending item number sequence. Figure numbers are listed directly beneath the group header.


b. *Section III. Special Tools List.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbered items appearing in the listing, followed by a list in alphabetic sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns (Section II and III)

a. *Item No. (Column (1)).* Indicates the number used to identify items called out in the illustration.

b. *SMR Code (Column (2)).* The source, maintenance, and recoverability (SMR) code is a five-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instruction, as shown in the following breakout:

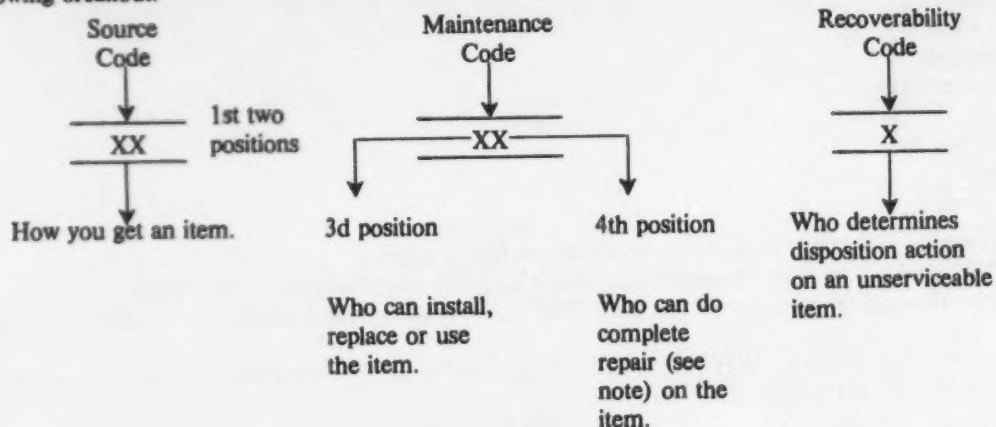

NOTE

Complete repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "Repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) *Source code.* The source code tells you how to get an item needed for maintenance, repair, or overhaul of an end item/equipment. Explanations of source codes follows:

Code	Explanation
PA	Stocked items; use the applicable NSN to request/requisition items with these source codes. They are authorized to the category indicated by the code entered in the third position of the SMR code.
PB	
PC	
PD	
PE	
PF	
PG	

NOTE

Items coded PC are subject to deterioration.

Code	Explanation
KD KF KB	Items with these codes are not to be requested/requisitioned individually. They are part of a kit which is authorized to the maintenance category indicated in the third position of the SMR code. The complete kit must be requisitioned and applied.

MO—Made at org/AVUM category MF—Made at DS/AVUM category MH—Made at GS category ML—Made at Specialized Repair Activity (SRA) MD—Made at Depot	Items with these codes are not to be requested/requisitioned individually. They must be made from bulk material which is identified by the part number in the description and usable on code (UOC) column and listed in the Bulk Material group of the repair parts list. If the item is authorized to you by the third position code of the SMR code, but the source code indicates it is made at a higher category, order the item from the higher category of maintenance.
---	---

AO—Assembled by org/AVUM category AF—Assembled by DS/AVIM category AH—Assembled by GS category AL—Assembled by SRA AD—Assembled by Depot	Items with these codes are not to be requested/requisitioned individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the category of maintenance indicated by the source code. If the third position code of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher category, order the item from the higher category of maintenance.
--	--

Code	Explanation
XA	Do not requisition an "XA" coded item. Order its next higher assembly.
XB	If an "XB" item is not available from salvage, order it using the FSCM and part number given.
XC	Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturers part number.
XD	Item is not stocked. Order an "XD" coded item through normal supply channels using the FSCM and part number given, if no NSN is available.

NOTE

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes, except for those source coded "XA" or those aircraft support items restricted by requirements of AR 750-1.

(2) *Maintenance code.* Maintenance codes tell you the category of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

(a) The maintenance code entered in the third position tells you the lowest maintenance category authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to one of the following categories of maintenance.

Code	Application/Explanation
C	Crew or operator maintenance done within organizational or aviation maintenance.
O	Organizational or aviation unit category can remove, replace, and use the item.
F	Direct support or aviation intermediate category can remove, replace, and use the item.
H	General support category can remove, replace, and use the item.
L	Specialized repair activity can remove, replace, and use the item.
D	Depot category can remove, replace, and use the item.

(b) The maintenance code entered in the fourth position tells whether or not the item is to be repaired and identifies the lowest maintenance category with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following maintenance codes.

NOTE

Some limited repair may be done on the item at a lower category of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.

Code	Application/Explanation
O—	Organizational or aviation unit is the lowest category that can do complete repair of the item.
F—	Direct support or aviation intermediate is the lowest category that can do complete repair of the item.
H—	General support is the lowest category that can do complete repair of the item.
L—	Specialized repair activity (designate the specialized repair activity) is the lowest category that can do complete repair of the item.
D—	Depot is the lowest category that can do complete repair of the item.
Z—	Nonreparable. No repair is authorized.
B—	No repair is authorized. (No parts or special tools are authorized for the maintenance of a "B" coded item). However, the item may be reconditioned by adjusting, lubricating, etc., at the user category.

(3) *Recoverability code.* Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR Code as follows:

Recoverability codes	Application/Explanation
Z—	Nonreparable item. When unserviceable, condemn and dispose of the item at the category of maintenance shown in the third position of SMR Code.
O—	Reparable item. When uneconomically repairable, condemn and dispose of the item at organizational or aviation unit category.
F—	Reparable item. When uneconomically repairable, condemn and dispose of the item at direct support or aviation intermediate category.
H—	Reparable item. When uneconomically repairable, condemn and dispose of the item at general support category.
D—	Reparable item. When beyond lower category repair capability, return to depot. Condemnation and disposal of item not authorized below depot category.
L—	Reparable item. Condemnation and disposal not authorized below specialized repair activity (SRA).
A—	Item requires special handling or condemnation procedures because of specific reasons (e.g., precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. *FSCM (Column (3)).* The Federal Supply Code for Manufacturer (FSCM) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

d. *Part Number (Column (4)).* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When you use a NSN to requisition an item, the item you receive may have a different part number from the part ordered.

e. *Description and Usable on Code (UOC) (Column (5)).* This column includes the following information.

(1) The Federal item name and, when required, a minimum description to identify the item.

(2) The statement "END OF FIGURE" appears just below the last item description in Column (5) for a given figure in both section II and section III.

f. *Qty (Column (6)).* Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that the quantity is variable and the quantity may vary from application to application.

4. Explanation of Columns (Section IV)

a. *National Stock Number (NSN) Index.*

(1) *Stock number column.* This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN. When using this column to locate an item, ignore the first four digits of the NSN. When requisitioning items use the complete NSN (13 digits).

(2) *Fig. column.* This column lists the number of the figure where the item is identified/located. The illustrations are in numerical sequence in sections II and III.

(3) *Item column.* The item number identifies the item associated with the figure listed in the adjacent Fig. column.

This item is also identified by the NSN listed on the same line.

b. Part Number Index. Part numbers in this index are listed by part number in ascending alphameric sequence.

- (1) *FSCM column.* This column lists the Federal supply code for manufacturer (FSCM).
- (2) *Part number column.* This column indicates the part number assigned to the item.
- (3) *Stock number column.* This column lists the National stock number for the associated part number and manufacturer identified in the part number and FSCM columns to the left.
- (4) *Fig. column.* This column lists the number of the figure where the item is identified/located in sections II and III.
- (5) *Item column.* The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

5. Special Information

a. Associated Publications. The publication listed below pertains to the TS-3171A/U and its components:

TM 11-6625-2643-14, Test Set, Audio TS-3171A/U

b. National Stock Numbers. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-MM, Fort Monmouth, NJ 07703-5006 for the part required to support your equipment.

6. How to Locate Repair Parts

a. When National stock number or part number is not known.

(1) *First.* Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and listings are divided into the same groups.

(2) *Second.* Find the figure covering the assembly group or subassembly group to which the item belongs.

(3) *Third.* Identify the item on the figure and note the item number.

(4) *Fourth.* Refer to the Repair Parts List for the figure to find the part number for the item number noted on the figure.

(5) *Fifth.* Refer to the Part Number Index to find the NSN, if assigned.

b. When National stock number or part number is known.

(1) *First.* Using the index of National stock numbers and part numbers, find the pertinent National stock number or part number. The NSN index is in National item identification number (NIIN) sequence (para 4a(1)). The part numbers in the part number index are listed in ascending alphameric sequence (para 4b). Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.

(2) *Second.* After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.

7. Abbreviations

Not applicable.

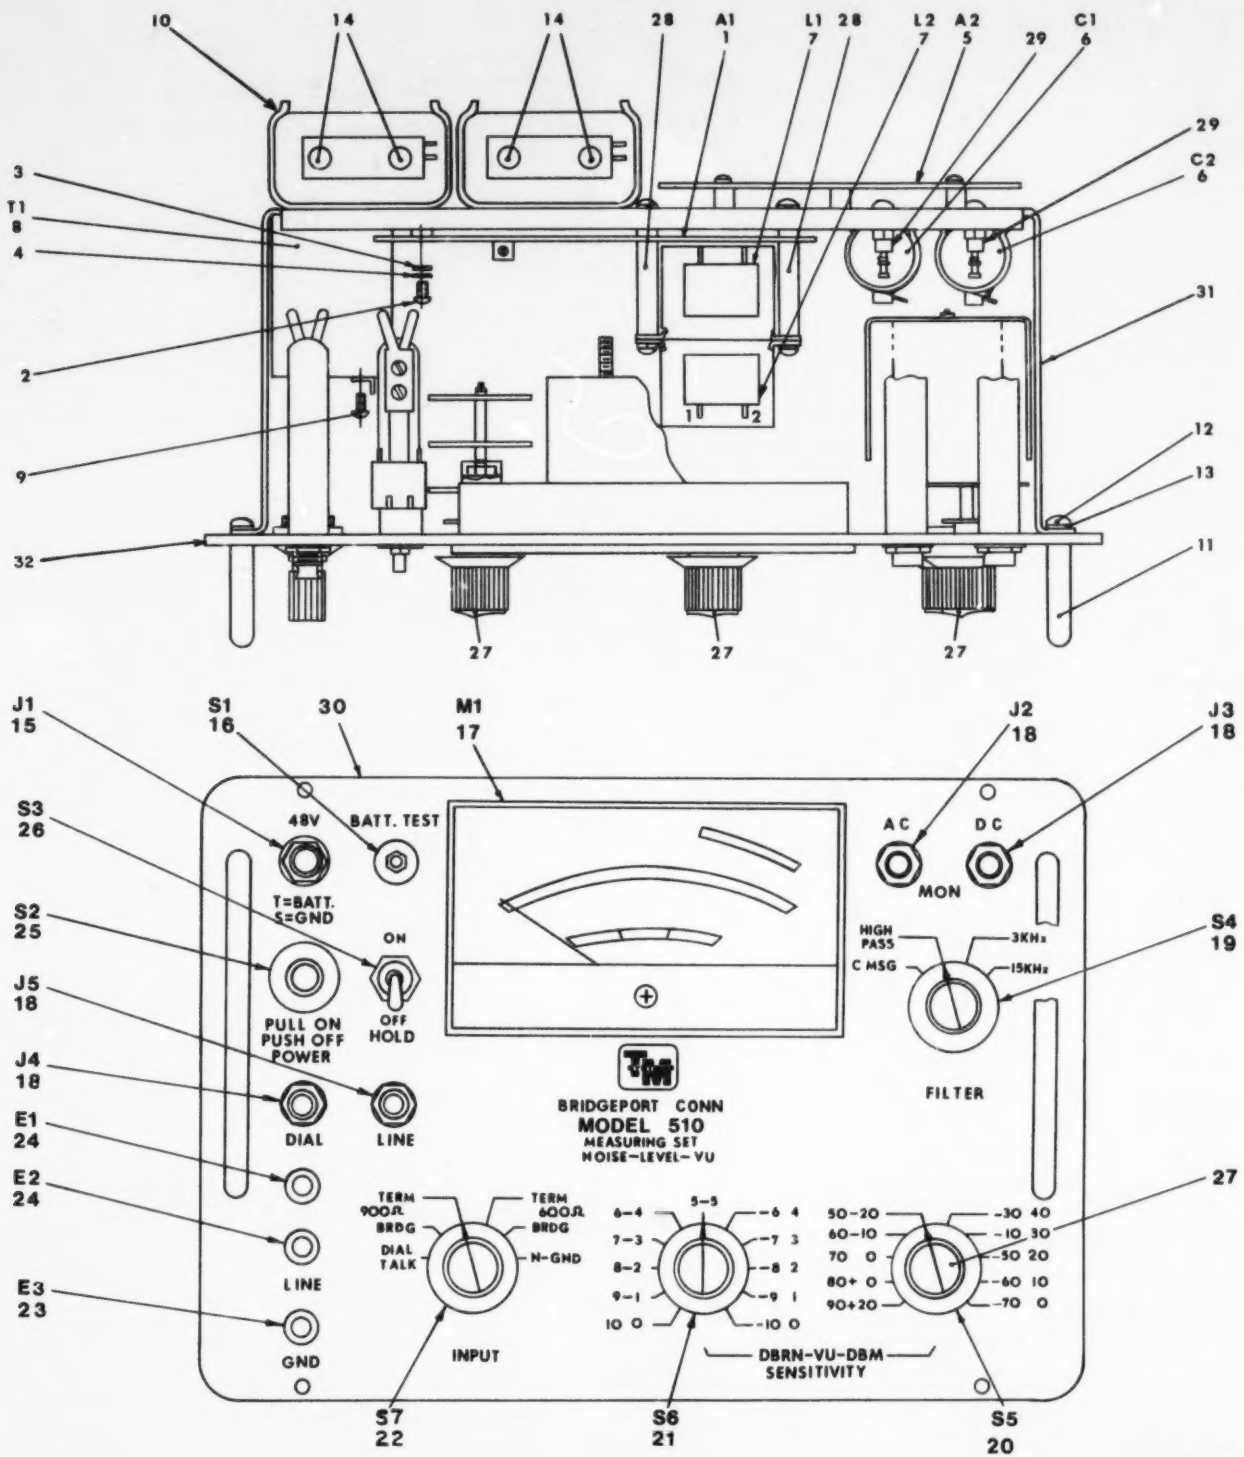


Figure 1. Test Set, Audio TS-3171A/U


EL3EJ1

SECTION II			TM11-6625-2643-24P	(5)	(6)
(1)	(2)	(3)	(4)		
ITEM	SMR		PART	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
NO	CODE	F5CM	NUMBER	GROUP 00 TEST SET, AUDIO TS-3171A/U	

FIG 1

1	PAHHH	24361	35101010	CIRCUIT CARD ASSEMB.....	1
2	PAHZZ	96906	MS51957-27	SCREW,MACHINE.....	3
3	PAHZZ	96906	MS15795-806	WASHER,FLAT.....	3
4	PAHZZ	96906	MS35338-136	WASHER,LOCK.....	3
5	PAHHH	24361	35101020	CIRCUIT CARD ASSEMB.....	1
6	PAHZZ	00853	052HJ101W150B	CAPACITOR,FIXED,ELE.....	2
7	PAHZZ	00348	M7128	INDICATOR,FIXED.....	2
8	PAHZZ	24361	15108401	TRANSFORMER,AUDIO F.....	1
9	PAHZZ	96906	MS2469353	SCREW,MACHINE.....	4
10	XBHZZ	24361	25103102	HLDR,BTTY.....	2
11	XBHZZ	24361	19048415	HANDLE.....	2
12	PAHZZ	96906	MS51957-43	SCREW,MACHINE.....	4
13	PAHZZ	96906	MS35338-137	WASHER,LOCK.....	4
14	XBHZZ	91833	74	SNAPS,BTTY.....	2
15	PAHZZ	81349	M641/9-2	JACK,TELEPHONE.....	1
16	PAHZZ	82389	976	SWITCH,PUSH.....	1
17	PAHZZ	24361	15108402	METER.....	1
18	PAHZZ	82389	M443B	JACK,TELEPHONE.....	4
19	PAHZZ	71590	PA1002	SWITCH,ROTARY.....	1
20	PAHZZ	76854	399737K	SWITCH,ROTARY.....	1
21	PAHZZ	71590	PA-1000	SWITCH,ROTARY.....	1
22	PAHZZ	76854	399431K	SWITCH,ROTARY.....	1
23	PAHZZ	55548	1517-104	POST,BINDING,EL.....	1
24	PAHZZ	58474	BP30-10R	POST,BINDING,ELECTR.....	2
25	PAHZZ	81640	C200P7	SWITCH,PUSH.....	1
26	PAHZZ	96906	MS25100-22	SWITCH,TOGGLE.....	1
27	PAHZZ	49956	70-3BL2G	KNOB.....	4
28	XBHZZ	06540	8169A0632	STANDOFF.....	2
29	PAHZZ	55548	52-1502	TERMINAL,STUD.....	4
30	PAHHH	24361	35103106	CASE ASSEMBLY.....	1
31	XBHZZ	24361	45106202	CHASSIS,ASSY.....	1
32	XBHHH	24361	451062FP	FRONT PANEL.....	1

END OF FIGURE

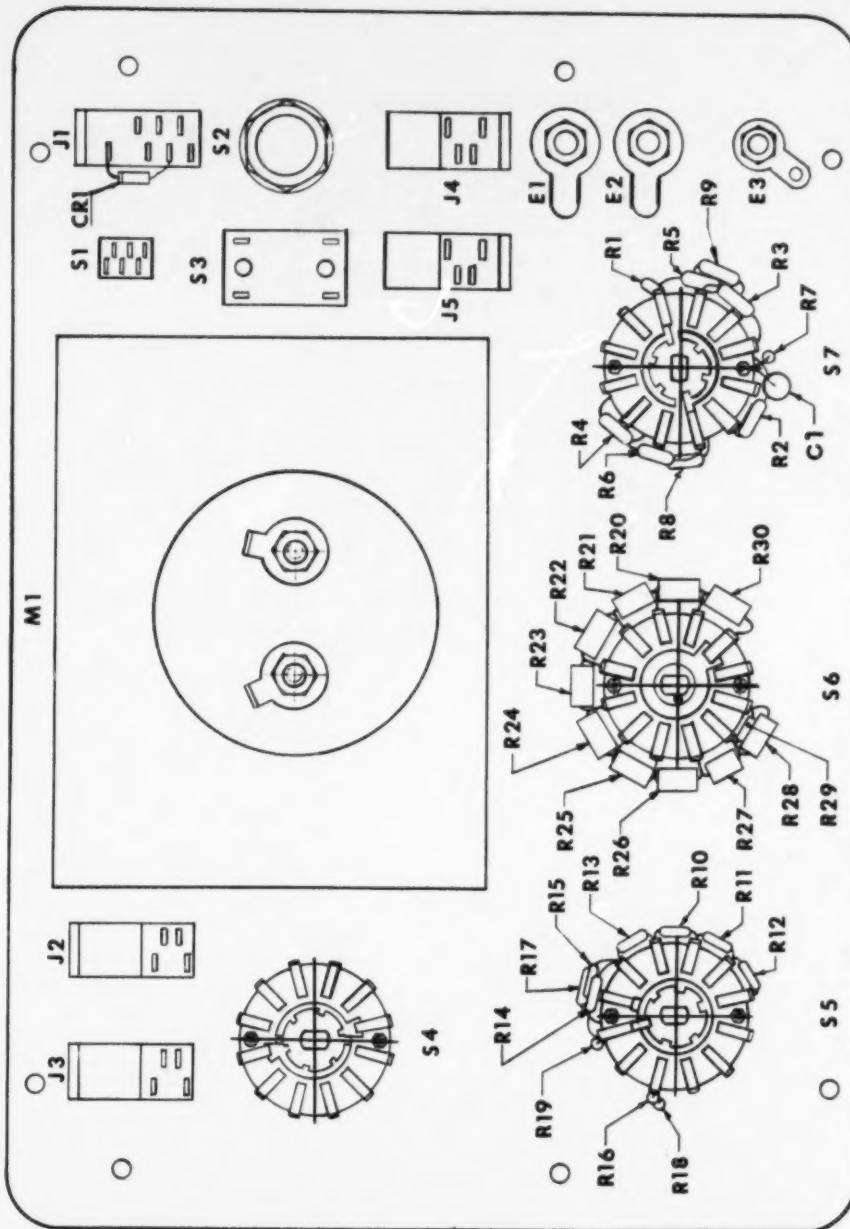

EL3EJ2

Figure 2. Front Panel (Sheet 1 of 2)

LEGEND FOR FIGURE 2

REF DES	ITEM NO.	REF DES	ITEM NO.
C1	26	R15	12
CR1	27	R16	13
R1	1	R17	12
R2	1	R18	13
R3	2	R19	14
R4	2	R20	15
R5	3	R21	16
R6	3	R22	17
R7	4	R23	18
R8	5	R24	19
R9	6	R25	20
R10	7	R26	21
R11	8	R27	22
R12	9	R28	23
R13	10	R29	24
R14	11	R30	25


Figure 2. Front Panel (Sheet 2 of 2)

SECTION II			TM11-6625-2643-24P		
(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
GROUP 01 FRONT PANEL					

FIG 2

1	PAHZZ	81349	RNC60K4222FS	RESISTOR, FIXED, FILM.....	2
2	PAHZZ	81349	RNC60K4750FS	RESISTOR, FIXED, FILM.....	2
3	PAHZZ	81349	RNC60K3090FS	RESISTOR, FIXED, FILM.....	2
4	PAHZZ	81349	RNC60K1101FS	RESISTOR, FIXED, FILM.....	1
5	PAHZZ	81349	RBR57L49900BR	RESISTOR, FIXED, WIRE.....	1
6	PAHZZ	81349	RNC60K8452FS	RESISTOR, FIXED, FILM.....	1
7	PAHZZ	81349	RBR57L14001BM	RES, FXD.....	1
8	PAHZZ	81349	RBR57L44200	RESISTOR, FIXED, WIRE.....	1
9	PAHZZ	81349	RBR57L14000BR	RESISTOR, FIXED, WIRE.....	1
10	PAHZZ	81349	RBR57L17200BM	RESISTOR, FIXED, WIRE.....	1
11	PAHZZ	81349	RBR57L06490BM	RESISTOR, FIXED, WIRE.....	1
12	PAHZZ	81349	RBR57L07250BM	RESISTOR, FIXED, WIRE.....	2
13	PAHZZ	81349	RBR57L21501BM	RESISTOR, FIXED, WIRE.....	2
14	PAHZZ	81349	RCR07G126JS	RESISTOR, FIXED, COMP.....	1
15	PAHZZ	81349	RBR57L28000BR	RESISTOR, FIXED, WIRE.....	1
16	PAHZZ	81349	RBR57L19600BR	RESISTOR, FIXED, WIRE.....	1
17	PAHZZ	81349	RBR57L14200BR	RESISTOR, FIXED, WIRE.....	1
18	PAHZZ	81349	RBR57L11000BR	RESISTOR, FIXED, WIRE.....	1
19	PAHZZ	81349	RBR57L08870BM	RES, FXD.....	1
20	PAHZZ	81349	RBR57L06980BM	RESISTOR, FIXED, WIRE.....	1
21	PAHZZ	81349	RBR57L05620BM	RESISTOR, FIXED, WIRE.....	1
22	PAHZZ	81349	RBR57L04750BM	RESISTOR, FIXED, WIRE.....	1
23	PAHZZ	81349	RBR57L04600BM	RESISTOR, FIXED, WIRE.....	1
24	PAHZZ	81349	RCR07G302JS	RESISTOR, FIXED, COMP.....	1
25	PAHZZ	81349	RBR57L42200BR	RESISTOR, FIXED, WIRE.....	1
26	PAHZZ	56289	30D205G025AA4	CAPACITOR, FIXED, ELE.....	1
27	PAHZZ	81349	JAN1N645	SEMICONDUCTOR DEVIC.....	1

END OF FIGURE

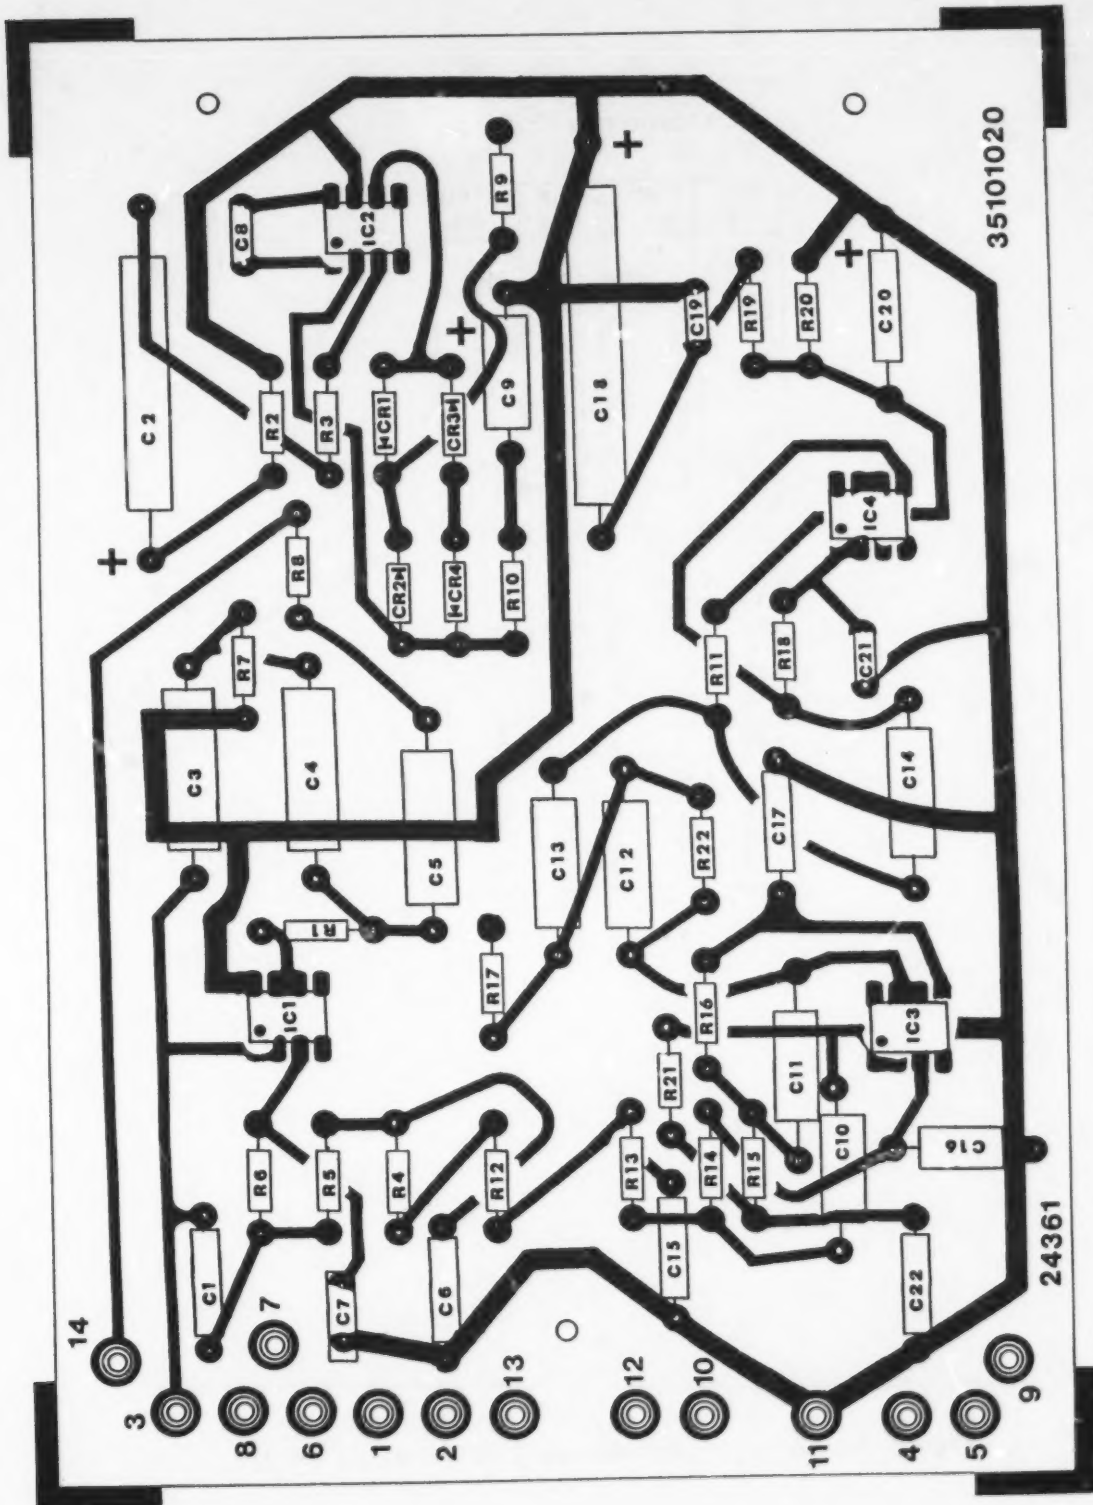

EL3EJ3

NOTE: PREFIX ALL REFERENCE DESIGNATIONS WITH A2

Figure 3. Circuit Card Assembly A2 (Sheet 1 of 2)

LEGEND FOR FIGURE 3

REF DES.	ITEM NO.	REF DES.	ITEM NO.
C1	1	IC1	16
C2	2	IC2	17
C3	3	IC3	16
C4	3	IC4	16
C5	3	R1	18
C6	4	R2	19
C7	5	R3	20
C8	6	R4	21
C9	7	R5	21
C10	8	R6	21
C11	8	R7	22
C12	9	R8	23
C13	9	R9	24
C14	9	R10	25
C15	10	R11	26
C16	11	R12	21
C17	11	R13	21
C18	2	R14	21
C19	12	R15	21
C20	13	R16	21
C21	12	R17	22
C22	14	R18	23
CR1	15	R19	27
CR2	15	R20	27
CR3	15	R21	21
CR4	15	R22	28


Figure 3. Circuit Card Assembly A2 (Sheet 2 of 2)

SECTION II			TM11-6625-2643-24P		
(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
					GROUP 02 CIRCUIT CARD ASSEMBLY A2

FIG 3

1	PAHZZ	27735	PC11-0033-200-2	CAPACITOR, FIXED, PLA.....	1
2	PAHZZ	56289	30D207G012DF0	CAPACITOR, FIXED, ELE.....	1
3	PAHZZ	27735	PC12-082-100-2	CAPACITOR, FIXED, PLA.....	3
4	PAHZZ	27735	PS11-00158-100-2	CAPACITOR, FIXED, PLA.....	1
5	PAHZZ	72136	DM15F221F0500	CAPACITOR, FIXED, MIC.....	1
6	PAHZZ	81349	CMR04E200J0DR	CAPACITOR, FIXED, MIC.....	1
7	PAHZZ	56289	196D226X9015KA1	CAPACITOR, FIXED, ELE.....	1
8	PAHZZ	27735	PC11-018-100-2	CAPACITOR, FIXED, PLA.....	2
9	PAHZZ	27735	PC11-058-100-2	CAPACITOR, FIXED, PLA.....	3
10	PAHZZ	27735	PS11-0073-100-2	CAPACITOR, FIXED, PLA.....	1
11	PAHZZ	27735	PC11-001-200-2	CAPACITOR, FIXED, PLA.....	2
12	PAHZZ	56289	30D207G025DH0	CAPACITOR, FIXED, ELE.....	1
13	PAHZZ	56289	30D106G012BA0	CAP, FXD.....	1
14	PAHZZ	27735	PC11-006-100-2	CAPACITOR, FIXED, PLA.....	1
15	PAHZZ	81349	JAN1N3064	SEMICONDUCTOR DEVIC.....	4
16	PAHZZ	26916	058-001691	MICROCIRCUIT, LINEAR.....	3
17	PAHZZ	18324	N5748V	MICROCIRCUIT, LINEAR.....	1
18	PAHZZ	81349	RN55D1411F	RESISTOR, FIXED, COMP.....	1
19	PAHZZ	81349	RCR07G104JS	RESISTOR, FIXED, COMP.....	1
20	PAHZZ	81349	RCR07G511JS	RESISTOR, FIXED, COMP.....	1
21	PAHZZ	81349	RNC55J1002FS	RESISTOR, FIXED, FILM.....	9
22	PAHZZ	81349	RNC55K3571FS	RESISTOR, FIXED, FILM.....	2
23	PAHZZ	81349	RNC55K2212FS	RESISTOR, FIXED, FILM.....	2
24	PAHZZ	81349	RNC55K1001FS	RESISTOR, FIXED, FILM.....	1
25	PAHZZ	81349	RNC55K5760FS	RESISTOR, FIXED, FILM.....	1
26	PAHZZ	81349	RNC55K8660FS	RESISTOR, FIXED, FILM.....	1
27	PAHZZ	81349	RCR07G473JS	RESISTOR, FIXED, COMP.....	2
28	PAHZZ	81349	RNC55K7501FS	RESISTOR, FIXED, FILM.....	1

END OF FIGURE

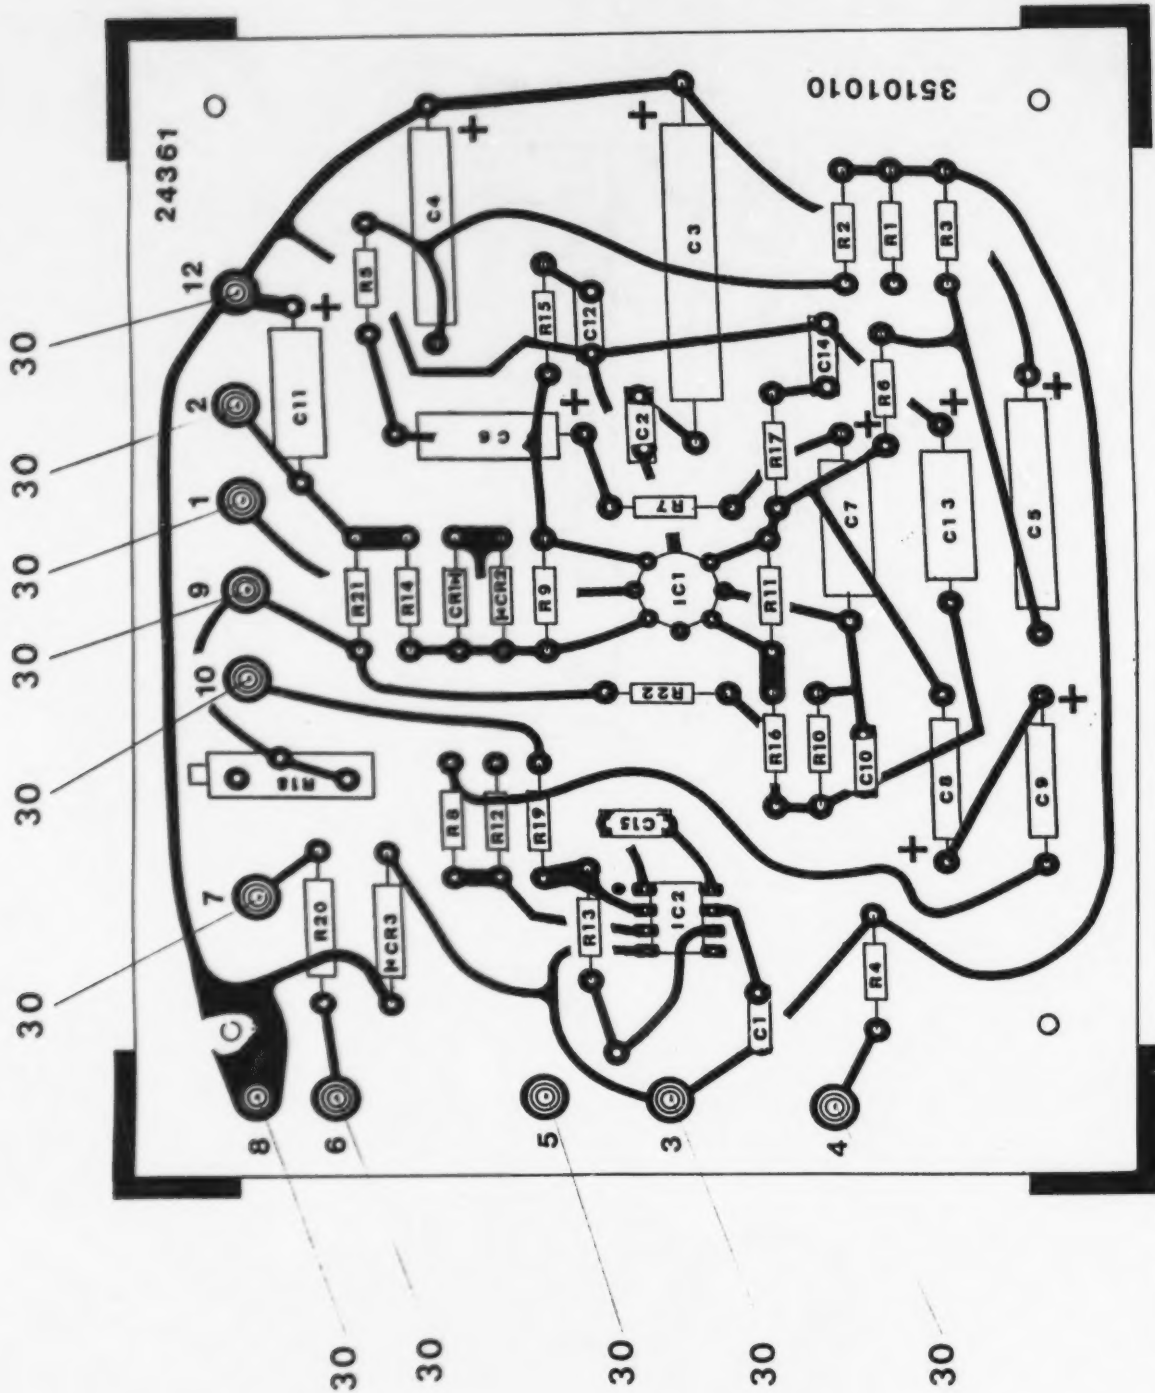

NOTE: PREFIX ALL REFERENCE DESIGNATIONS WITH A1

Figure 4. Circuit Card Assembly A1 (Sheet 1 of 2)

EL3EJ4

LEGEND FOR FIGURE 4

REF DES	ITEM NO.	REF DES	ITEM NO.
C1	1	R2	15
C2	1	R3	15
C3	2	R4	16
C4	3	R5	17
C5	3	R6	17
C6	4	R7	18
C7	4	R8	19
C8	5	R9	20
C9	5	R10	21
C10	6	R11	20
C11	5	R12	19
C12	7	R13	22
C13	5	R14	23
C14	8	R15	24
C15	9	R16	25
CR1	10	R17	26
CR2	10	R18	27
CR3	11	R19	28
IC1	12	R20	29
IC2	13	R21	17
R1	14	R22	17

Figure 4. Circuit Card Assembly A1 (Sheet 2 of 2)

SECTION II			TM11-6625-2643-24P		
(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
					GROUP 03 CIRCUIT CARD ASSEMBLY A1


FIG 4

1	PAHZZ	56289	C023B101F102	CAPACITOR, FIXED, CER.....	2
2	PAHZZ	56289	30D207GD16DF0	CAPACITOR, FIXED, ELE.....	1
3	PAHZZ	56289	30D107GD25DB0	CAPACITOR, FIXED, ELE.....	2
4	PAHZZ	56289	30D205G012BA0	CAPACITOR, FIXED, ELE.....	2
5	PAHZZ	56289	30D106G012BA0	CAP, FXD.....	4
6	PAHZZ	72136	DM15C681K05004CR	CAPACITOR, FIXED, MIC.....	1
7	PAHZZ	56289	C067B2J1G822K	CAPACITOR, FIXED, CER.....	1
8	PAHZZ	60705	C067B251G392K	CAPACITOR, FIXED, CER.....	1
9	PAHZZ	56289	C030B102E200J	CAP, FXD.....	1
10	PAHZZ	81349	JAN1N3064	SEMICONDUCTOR DEVIC.....	2
11	PAHZZ	81349	1N3028B	SEMICONDUCTOR DEVIC.....	REF
12	PAHZZ	34148	UA749DHC	MICROCIRCUIT, LINEAR.....	1
13	PAHZZ	18324	N5748V	MICROCIRCUIT, LINEAR.....	1
14	PAHZZ	16845	1000-409-16	TRANSISTOR.....	1
15	PAHZZ	81349	RCR07G102JS	RESISTOR, FIXED, COMP.....	2
16	PAHZZ	81349	RCR07G203JS	RESISTOR, FIXED, COMP.....	1
17	PAHZZ	16845	1000-483-23	RESISTOR, FIXED.....	4
18	PAHZZ	81349	RCR07G182JS	RESISTOR, FIXED, COMP.....	1
19	PAHZZ	81349	RNC55K2742FS	RESISTOR, FIXED, FILM.....	2
20	PAHZZ	81349	RNC55K1003FS	RESISTOR, FIXED, FILM.....	2
21	PAHZZ	81349	RCR07G104JS	RESISTOR, FIXED, COMP.....	1
22	PAHZZ	81349	RNC55J1002FS	RESISTOR, FIXED, FILM.....	1
23	PAHZZ	81349	RN55D3261F	RESISTOR, FIXED, COMP.....	1
24	PAHZZ	81349	RCR07G130JS	RESISTOR, FIXED, COMP.....	1
25	PAHZZ	81349	RNC55K1621FS	RESISTOR, FIXED, FILM.....	1
26	PAHZZ	81349	RCR07G200JS	RESISTOR, FIXED, COMP.....	1
27	XBHZZ	73138	89P100K	RES, VAR.....	1
28	PAHZZ	81349	RNC55K2491FS	RESISTOR, FIXED, FILM.....	1
29	PAHZZ	81349	RCR42G821JS	RESISTOR, FIXED, COMP.....	1
30	XBHZZ	24361	19048441-2	TERMINAL.....	11

END OF FIGURE

EL3EJ6

Figure 5. Case Assembly

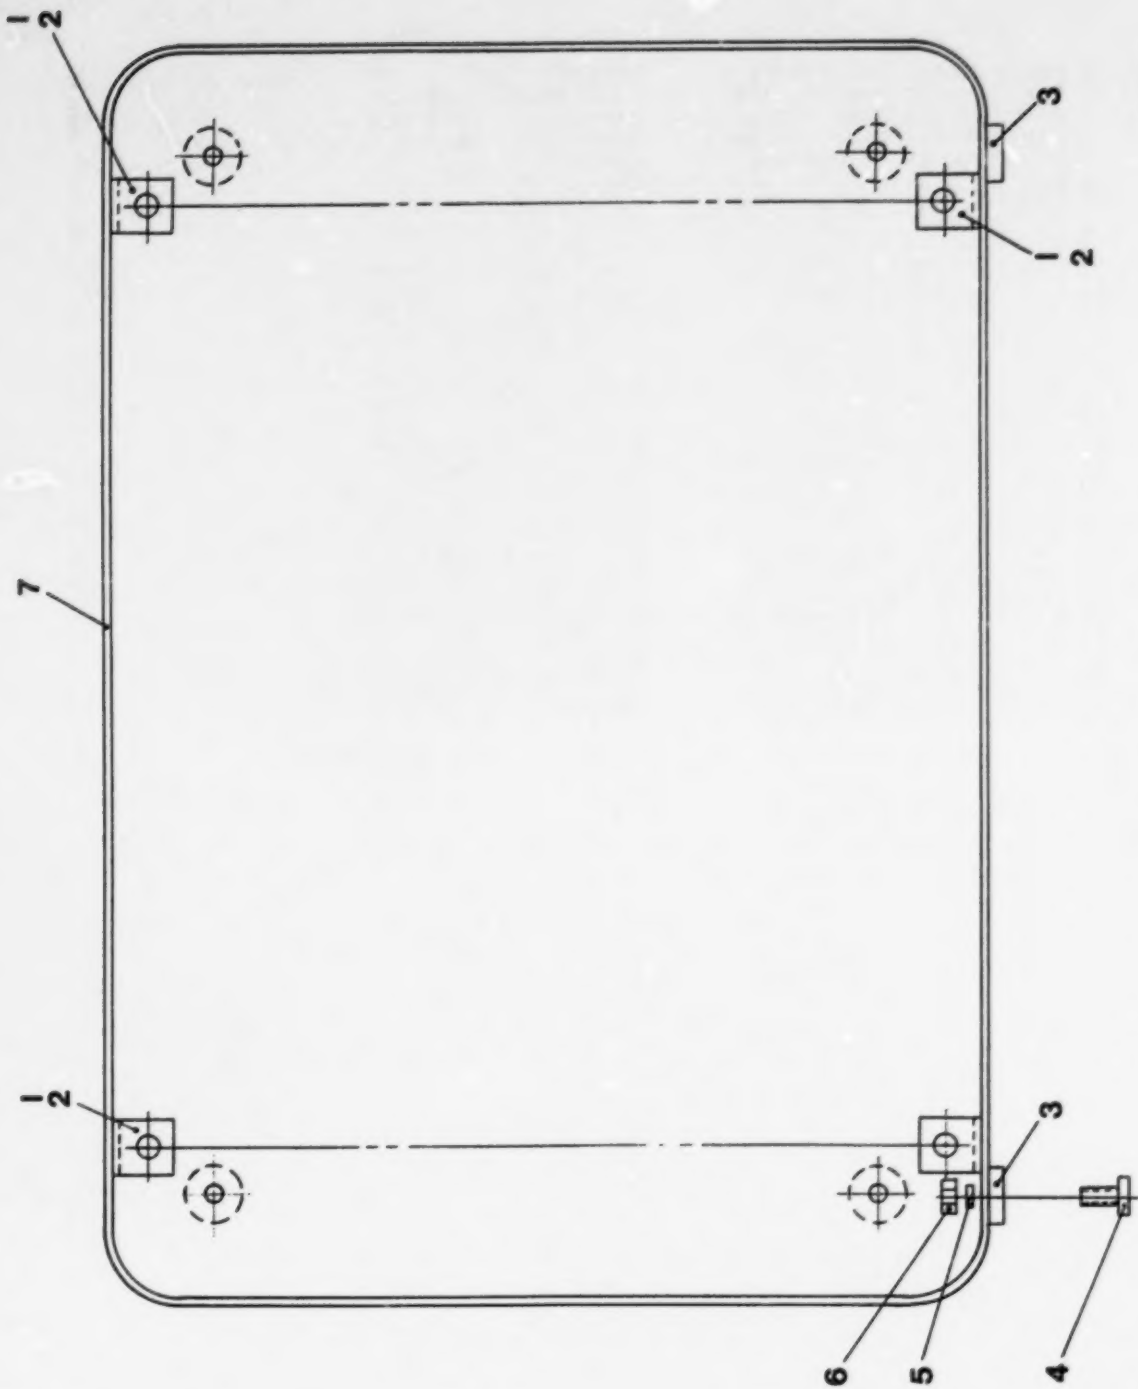

SECTION II			TM11-6625-2643-24P		
(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC) QTY	

GROUP 04 CASE ASSEMBLY

FIG 5

1	XBHZZ	24361	25103105	BRACKET.....	4
2	XBHZZ	12360	6-32X3-8LG	SCREW MACHINE.....	4
3	XBHZZ	24361	19048421	BUMPER.....	8
4	PAHZZ	96906	MS51957-17	SCREW,MACHINE.....	8
5	PAHZZ	96906	MS15795-803	WASHER,FLAT.....	8
6	PAHZZ	96906	MS35649-244	NUT,PLAIN,HEXAGON.....	8
7	XBHZZ	93727	727-100	CASE.....	1

END OF FIGURE

SECTION IV

TM11-6625-2643-24P

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	NATIONAL STOCK NUMBER INDEX		STOCK NUMBER	FIG. ITEM	
	FIG.	ITEM		FIG.	ITEM
5930-00-034-2386	1	19	5935-00-950-1668	1	15
5305-00-054-5651	5	4	5305-00-957-2383	1	9
5305-00-054-6651	1	2	5355-00-989-4269	1	27
5305-00-054-6668	1	12	5910-01-025-0741	3	3
5930-00-055-3130	1	21	5910-01-025-0742	3	8
5930-00-070-7744	1	16	5910-01-025-0743	3	9
5961-00-087-6047	2	27	5910-01-025-0744	3	11
5905-00-106-9356	4	16	5910-01-025-2091	3	1
5905-00-110-0388	3	19	5910-01-025-2092	3	4
	4	21	5910-01-025-2093	3	10
5905-00-110-7620	4	15	5930-01-025-2227	1	20
5905-00-114-5343	4	18	5950-01-025-2279	1	8
5905-00-116-2394	3	20	6625-01-025-2506	1	7
5905-00-131-9729	2	24	5962-01-039-9414	3	16
5905-00-135-3972	4	26	5905-01-046-8939	2	5
5905-00-141-0717	3	27	5905-01-046-8940	2	18
5905-00-173-1622	2	4	5905-01-046-8941	2	25
5905-00-175-8508	4	29	5905-01-046-9105	2	9
5905-00-189-2474	2	2	5905-01-046-9108	2	15
5905-00-208-3883	2	3	5905-01-046-9109	2	16
5905-00-208-4293	4	20	5905-01-046-9110	2	17
5962-00-243-2496	4	12	5905-01-057-7442	2	8
5940-00-269-2220	1	24	6625-01-062-8957	1	1
5905-00-270-1325	3	23	5910-01-064-9674	3	6
5905-00-304-1303	3	22	5961-01-148-8413	4	14
5905-00-311-2351	2	6	5905-01-149-5107	4	17
5910-00-324-0121	4	8	5910-01-186-0076	3	14
5905-00-346-8062	3	25			
5910-00-361-8667	3	7			
5905-00-411-7490	4	24			
5905-00-432-0381	3	24			
5905-00-432-0409	4	19			
5905-00-432-6373	4	25			
5905-00-432-6379	4	28			
5905-00-432-6389	3	28			
5905-00-432-9157	3	26			
5905-00-452-0761	2	1			
5905-00-464-9805	2	14			
5310-00-595-6211	5	5			
5905-00-627-1080	3	21			
	4	22			
5910-00-760-9524	1	6			
5961-00-814-0768	3	15			
	4	10			
5910-00-864-8423	2	26			
5961-00-879-2474	4	11			
5310-00-880-5976	1	3			
5930-00-908-9664	1	22			
5310-00-929-6395	1	4			
5310-00-934-9748	5	6			

SECTION IV

TM11-6625-2643-24P

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX STOCK NUMBER	FIG.	ITEM
58474	BP30-10R	5940-00-269-2220	1	24
81349	CMR04E200J0DR	5910-01-064-9674	3	6
56289	C023B101F102		4	1
56289	C030B102E200J		4	9
56289	C067B2J1G822K		4	7
60705	C067B251G392K	5910-00-324-0121	4	8
81640	C200P7		1	25
72136	DM15C681K05004CR		4	6
72136	DM15F221F0500		3	5
81349	JAN1N3064	5961-00-814-0768	3	15
			4	10
81349	JAN1N645	5961-00-087-6047	2	27
96906	MS15795-803	5310-00-595-6211	5	5
96906	MS15795-806	5310-00-880-5976	1	3
96906	MS2469353	5305-00-957-2383	1	9
96906	MS25100-22		1	26
96906	MS35338-136	5310-00-929-6395	1	4
96906	MS35338-137		1	13
96906	MS35649-244	5310-00-934-9748	5	6
96906	MS51957-17	5305-00-054-5651	5	4
96906	MS51957-27	5305-00-054-6651	1	2
96906	MS51957-43	5305-00-054-6668	1	12
82389	M443B		1	18
81349	M641/9-2	5935-00-950-1668	1	15
00348	M7128	6625-01-025-2506	1	7
18324	N5748V		3	17
			4	13
71590	PA-1000	5930-00-055-3130	1	21
71590	PA1002	5930-00-034-2386	1	19
27735	PC11-001-200-2	5910-01-025-0744	3	11
27735	PC11-0033-200-2	5910-01-025-2091	3	1
27735	PC11-006-100-2	5910-01-186-0076	3	14
27735	PC11-018-100-2	5910-01-025-0742	3	8
27735	PC11-058-100-2	5910-01-025-0743	3	9
27735	PC12-082-100-2	5910-01-025-0741	3	3
27735	PS11-00158-100-2	5910-01-025-2092	3	4
27735	PS11-0073-100-2	5910-01-025-2093	3	10
81349	RBR57L04600BM		2	23
81349	RBR57L04750BM		2	22
81349	RBR57L05620BM		2	21
81349	RBR57L06490BM		2	11
81349	RBR57L06980BM		2	20
81349	RBR57L07250BM		2	12
81349	RBR57L08870BM		2	19
81349	RBR57L11000BR	5905-01-046-8940	2	18
81349	RBR57L14000BR	5905-01-046-9105	2	9
81349	RBR57L14001BM		2	7
81349	RBR57L14200BR	5905-01-046-9110	2	17
81349	RBR57L17200BM		2	10
81349	RBR57L19600BR	5905-01-046-9109	2	16
81349	RBR57L21501BM		2	13

SECTION IV

TM11-6625-2643-24P

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX STOCK NUMBER	FIG.	ITEM
81349	RBR57L28000BR	5905-01-046-9108	2	15
81349	RBR57L42200BR	5905-01-046-8941	2	25
81349	RBR57L44200	5905-01-057-7442	2	8
81349	RBR57L49900BR	5905-01-046-8939	2	5
81349	RCR07G102JS	5905-00-110-7620	4	15
81349	RCR07G104JS	5905-00-110-0388	3	19
			4	21
81349	RCR07G126JS	5905-00-464-9805	2	14
81349	RCR07G130JS	5905-00-411-7490	4	24
81349	RCR07G182JS	5905-00-114-5343	4	18
81349	RCR07G200JS	5905-00-135-3972	4	26
81349	RCR07G203JS	5905-00-106-9356	4	16
81349	RCR07G302JS	5905-00-131-9729	2	24
81349	RCR07G473JS	5905-00-141-0717	3	27
81349	RCR07G511JS	5905-00-116-2394	3	20
81349	RCR42G821JS	5905-00-175-8508	4	29
81349	RNC55J1002FS	5905-00-627-1080	3	21
			4	22
81349	RNC55K1001FS	5905-00-432-0381	3	24
81349	RNC55K1003FS	5905-00-208-4293	4	20
81349	RNC55K1621FS	5905-00-432-6373	4	25
81349	RNC55K2212FS	5905-00-270-1325	3	23
81349	RNC55K2491FS	5905-00-432-6379	4	28
81349	RNC55K2742FS	5905-00-432-0409	4	19
81349	RNC55K3571FS	5905-00-304-1303	3	22
81349	RNC55K5760FS	5905-00-346-8062	3	25
81349	RNC55K7501FS	5905-00-432-6389	3	28
81349	RNC55K8660FS	5905-00-432-9157	3	26
81349	RNC60K1101FS	5905-00-173-1622	2	4
81349	RNC60K3090FS	5905-00-208-3883	2	3
81349	RNC60K4222FS	5905-00-452-0761	2	1
81349	RNC60K4750FS	5905-00-189-2474	2	2
81349	RNC60K8452FS	5905-00-311-2351	2	6
81349	RN55D1411F		3	18
81349	RN55D3261F		4	23
34148	UA749DHC	5962-00-243-2496	4	12
00853	052HJ101W150B	5910-00-760-9524	1	6
26916	058-001691	5962-01-039-9414	3	16
81349	1N3028B	5961-00-879-2474	4	11
16845	1000-409-16	5961-01-148-8413	4	14
16845	1000-483-23	5905-01-149-5107	4	17
24361	15108401	5950-01-025-2279	1	8
24361	15108402		1	17
55548	1517-104		1	23
24361	19048415		1	11
24361	19048421		5	3
24361	19048441-2		4	30
56289	196D226X9015KA1	5910-00-361-8667	3	7
24361	25103102		1	10
24361	25103105		5	1
56289	30D106G012BA0		3	13

SECTION IV

TM11-6625-2643-24P

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX STOCK NUMBER	FIG.	ITEM
56289	30D106G012BA0		4	5
56289	30D107GD25DB0		4	3
56289	30D205G012BA0		4	4
56289	30D205G025AA4	5910-00-864-8423	2	26
56289	30D207GD16DF0		4	2
56289	30D207G012DF0		3	2
56289	30D207G025DH0		3	12
24361	35101010	6625-01-062-8957	1	1
24361	35101020		1	5
24361	35103106		1	30
76854	399431K	5930-00-908-9664	1	22
76854	399737K	5930-01-025-2227	1	20
24361	451062FP		1	32
24361	45106202		1	31
55548	52-1502		1	29
12360	6-32X3-8LG		5	2
49956	70-3BL2G	5355-00-989-4269	1	27
93727	727-100		5	7
91833	74		1	14
06540	8169A0632		1	28
73138	89P100K		4	27
82389	976	5930-00-070-7744	1	16

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM. CAREFULLY TEAR IT
OUT. FOLD IT AND DROP IT
IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703-5007

DATE SENT

10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

PUBLICATION DATE

23 Jan 78

PUBLICATION TITLE

Radar Set AN/PRC-76

BE EXACT. PIN-POINT WHERE IT IS

PAGE NO	PARA- GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out
on figure 19.

Add the cover of the junction box as an item in the
listing for figure 19.
Reason: Same as above

EXAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpirit of 999-1776

SIGN HERE

SSG I. M. DeSpirit

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS
ARE OBSOLETE.

PS--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPY OF THIS
AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

SAMPLE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG PERFORATED LINE

SOMETHING WRONG WITH THIS PUBLICATION?

DATE SENT _____

TM 11-6625-2643-24P

18 Nov 1985

TEST SET, AUDIO TS-3171A/U

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE
NO.

PARA-
GRAPH

FIGURE NO.

TABLE NO.

SIGN HERE

DA FORM 2028-2
JUL 79

**PREVIOUS EDITIONS
ARE OBSOLETE**

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG PERFORATED LINE

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

DATE SENT

TM 11-6625-2643-24P

18 Nov 1985

TEST SET, AUDIO TS-3171A/U

PAGE NO.	PARA- GRAPH	FIGURE NO.	TABLE NO.
-------------	----------------	---------------	--------------

THE IR-1000: PERFORMING BETTER

SIGN HERE

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

REVERSE OF DA FORM 2028-2

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM. CAREFULLY TEAR
IT OUT, FOLD IT AND
DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-2643-24P

PUBLICATION DATE

18 Nov 1985

PUBLICATION TITLE

TEST SET, AUDIO TS-3171A/U

BE EXACT PIN-POINT WHERE IT IS

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS
ARE OBSOLETE

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPE OF THIS
AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATED LINE

REVERSE OF DA FORM 2026-2

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG PERFORATED LINE

By Order of the Secretary of the Army:

JOHN A. WICKHAM JR.
General, United States Army
Chief of Staff

Official:

MILDRED E. HEDBERG
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36 literature requirements for TS-3171A/U.

★U.S. GOVERNMENT PRINTING OFFICE: 1986-605-042/20175